

**LEISTER**

塑料 焊接

# VARIMAT V2

新款上市



瑞士制造  
品质保证!





符合人体工程学设计:



直观方便:  
“e-drive”



免维护:




高技术产品:  
12m/min



焊缝部位控制:




高速度:

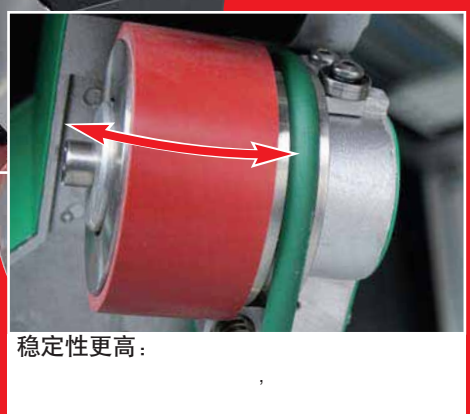

稳定性更高:

# VARIMAT V2





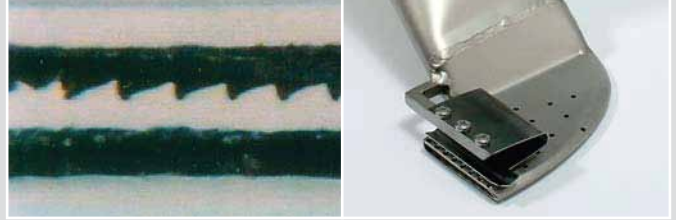


VARIMAT V2,



TPO



## VARIMAT V2

|  |  |   |
|--|--|---|
|    | <b>113.995</b><br><b>113.600</b>                   | 30 mm<br>40 mm                                  |
|     | <b>107.067</b>                                     |   |
|    | <b>107.612</b><br><b>107.613</b><br><b>107.611</b> | 230 V, 4400 W<br>400 V, 5500 W<br>200 V, 4000 W |
|    | <b>139.048</b>                                     | *<br>720 x 470 x 450 mm,                        |
|   | <b>132.429</b>                                     | 2<br>*  |
|  | <b>138.817</b>                                     | *   |
|  | <b>110.714</b>                                     | 2 8 5<br>17                                     |


\* 随设备一起发送给客户

- 8m/min,
- ,
- "e-Drive"

|       |                 |      |      |
|-------|-----------------|------|------|
| V~    | 200             | 230  | 400  |
| W     | 4200            | 4600 | 5700 |
| °C    | 20 – 620        |      |      |
| m/min | 0.7 – 12        |      |      |
| %     | 50 – 100        |      |      |
| mm    | 40              |      |      |
| mm    | 640 x 430 x 330 |      |      |
| kg    | 35              |      |      |

|         |                |
|---------|----------------|
| 138.108 | 230 V,         |
| 137.821 | 400 V, 16 A EC |
| 139.734 | 200 V,         |

根据客户要求, 可提供其它型号的产品。

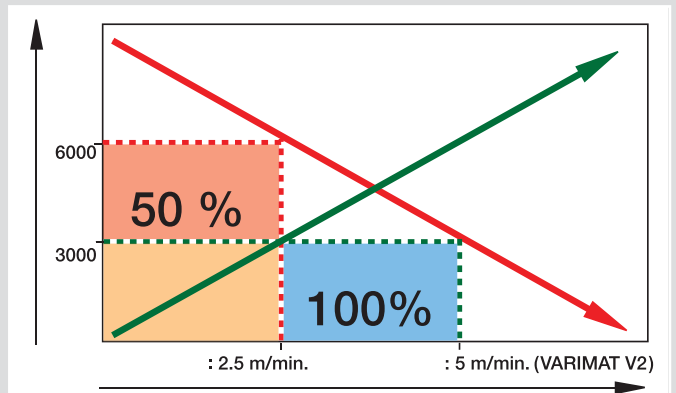

节省成本潜力大:


( 20,000 , 5m/min



VARIMAT V2 存放在非常牢固的运输包装箱中，取出或安放都很方便。



最好的屋面防水卷材焊接设备。

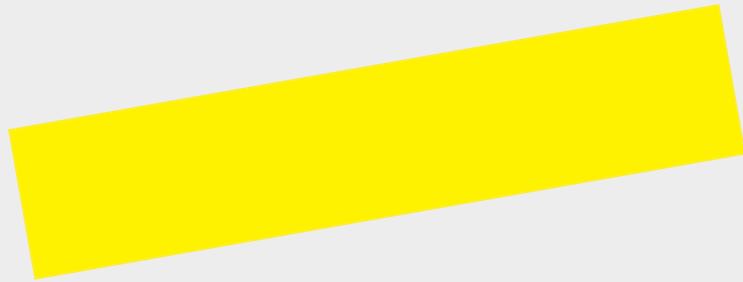

在30°的斜面上施工，不会有任何问题。



得益于其细长的流线型设计，它可以在4英寸这样狭窄的空间中进行焊接操作。





VARIMAT V2:

