




PLASTIC WELDING

**Welding of
banners with
Leister.**

Simply perfect.



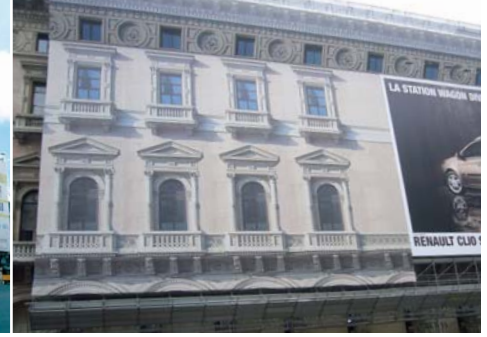

Hot air welding machine

UNIPLAN E

For efficient hot-air welding of industrial fabrics the UNIPLAN E is ideal. A guide roller keeps the tool precisely on course. Its digital display shows set and actual values of temperature and welding speed. The heating is electronically controlled.



- Small, light and handy
- Digital display
- Automatic start
- High welding speed
- Integrated lifting mechanism

Wedge welding machine

UNIPLAN WEDGE

The noiseless UNIPLAN WEDGE is the perfect machine for all critical materials. The innovative laser guide guarantees a flawless welding.



- Low noise
- High welding speed
- Portable and light
- Easy, comfortable operation
- Digital display of welding speed and temperature
- Innovative laser guide

Technical Data

Voltage	V~	120
Power consumption	W	1800
Frequency	Hz	60
Temperature	°F	68 – 1150
Speed	ft/min	3.0 – 24
Air flow	%	50 – 100 (steplessly)
Air flow (68°F)	cfm	10.5
Welding seam width	inch	0.8 or 1.2
Size (L x W x H)	inch	16 x 11 x 8
Weight	lbs	25 (with 10 ft cable)
Marking of conformity		CE
Approval mark		Ⓢ
Certification scheme		CCA
Protection class I		⊥

Article no

115.044	0.8 inch
115.043	1.2 inch
Other versions on request	

Technical Data

Voltage	V~	120
Power consumption	W	900
Frequency	Hz	60
Temperature	°F	68 – 1150
Speed	ft/min	3.0 – 24
Noise emission level L_{pA}	dB	50
Welding seam width	inch	0.8 or 1.2
Size (L x W x H)	inch	16 x 11 x 8
Weight	lbs	25.5 with 9 ft cable
Marking of conformity		CE
Approval mark		Ⓢ
Certification scheme		CCA
Protection class I		⊥

Article No.

116.973	0.8 inch
116.976	1.2 inch



Hand tool

TRIAC PID / TRIAC S

Thanks to micro-processor controlled temperature and electronic monitoring. The preferred hand tool for welding with high quality.



Fig.: TRIAC PID

- Reproducible results thanks to digital display of set and actual temperature (TRIAC PID)
- Welding results independent of voltage fluctuations and ambient temperature (TRIAC PID)
- Adaptor tube with heat protection
- Electronic heating element protection
- Motor shut-off at minimal carbon level
- Suitable for continuous operation

Technical Data

Voltage	V~	120
Power consumption	W	1600
Frequency	Hz	60
Temperature	°F	120 – 1292 (TRIAC S)
Air flow (68°F)	cfm	8.05
Size (L x Ø)	inch	13 x 3.5, handle Ø 2.2
Weight	lbs	3 (with 10 ft cable)
Marking of conformity		CE
Approval mark		Ⓢ
Certification scheme		CCA
Protection class II		□

Article no

TRIAC PID	100.749	with US plug, UL
TRIAC S	100.726	with US plug, UL

Other versions on request

Accessories

115.065 115.066		Overlap welding unit 0.8 inch Overlap welding unit 1.2 inch > UNIPLAN E
115.067		Weight with holder > UNIPLAN E
119.933 119.934		Hem welding kit 0.8 inch Hem welding kit 1.2 inch > UNIPLAN E
122.016		Hem cord welding kit without lifting device > UNIPLAN E
115.839		Handle with holder and screws > UNIPLAN E
122.022		Guide bar complete > UNIPLAN E
128.280 128.282		Hot-wedge 0.8 inch, 120 V~ Hot-wedge 1.2 inch, 120 V~ > UNIPLAN WEDGE
116.506		Laser guide > UNIPLAN WEDGE
106.975		One-arm pressure roller 1.6 inch, with ball bearings (silicon)
107.123		Wide slot nozzle 0.8 inch, push-fit > TRIAC PID > TRIAC S
107.132		Wide slot nozzle 1.6 inch, push-fit > TRIAC PID > TRIAC S

Technical data is subject to change without notice.



Headquarters:

Leister Process Technologies
Galileostrasse 10
6056 Kaegiswil/Switzerland

phone: +41 41 662 74 74
fax: +41 41 662 74 16
leister@leister.com

www.leister.com

Leister Process Technologies is an **ISO 9001:2000** certified enterprise.

Specifications are subject to change without prior notice.

Europe: Italy, Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Estonia, Denmark, Finland, France, Germany, Great Britain, Greece, Hungary, Ireland, Iceland, Latvia, Lithuania, Netherlands, Norway, Poland, Portugal, Romania, Russia, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey, Ukraine

Asia: P. R. China, Hong Kong, India, Indonesia, Iran, Japan, Korea, Malaysia, Philippines, Saudi Arabia, Singapore, Taiwan, Thailand, United Arab Emirates, Vietnam

America: Canada, Mexico, USA

Africa: Egypt, Kenya, Morocco, South Africa

Oceania: Australia, New Zealand

Our close worldwide network of more than 120 Sales and Service Centres in more than 60 countries.


© Copyright by Leister

Industrial Heat Sources LLC

44134 Cleveland, OH
Toll free number: 800 635 0384
www.industrialheatsources.com

Western Process Heat Inc.

92029 Escondido, CA
Toll free number: 800 694 1472
www.hotairtools.com

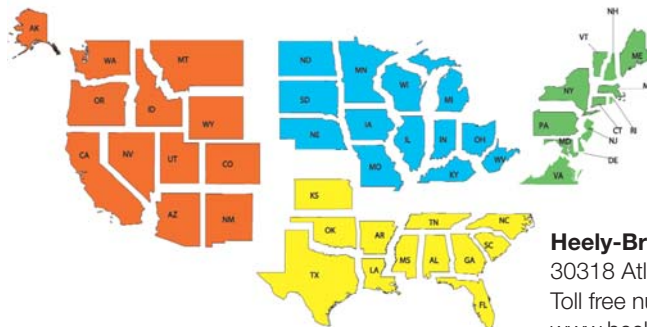

Malcom Company Inc.

02878 Tiverton, RI
Toll free number: 888 807 4030
www.malcom.com

Heely-Brown Company

30318 Atlanta, GA
Toll free number: 800 241 4628
www.heely-brown.com